


IMPROVED FORMULATION!


6326 RNLL




PRODUCT PROFILE

- Meets FMVSS 121 RSD stopping distance standard
- Meets FMVSS 121 @ 12,500 lbs. GAWR for steer axle applications
- Meets FMVSS 121 @ 20,000 lbs. GAWR for drive/trailer axle applications
- Crack resistant
- Copper-free
- Contributes to a balanced brake system when used on both tractor and trailer
- Can be used on trailers to provide superior stopping power

48%  **IMPROVED LINING LIFE***

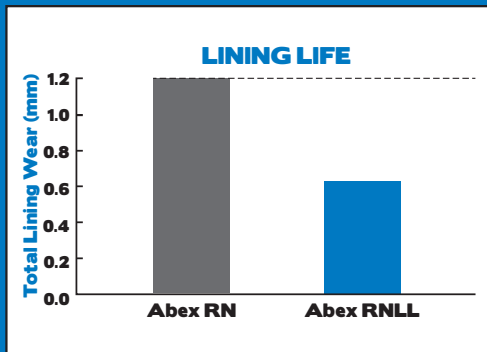

39%  **IMPROVED DRUM WEAR***

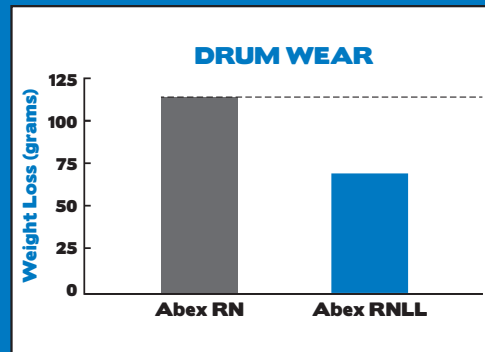

*Lining life and drum wear test results for Abex 6326 RNLL conducted internally on Link-certified dynamometer. Wear/temperature test performed on a Meritor 16.5" x 5" Q Plus S-cam drum brake at 12,500 lbs. GAWR.

The next generation of RSD is here! Abex® has a history of advancing brake technology backed by global R&D. The Long Life (LL) category of brake linings proves how Abex continues to advance lining life and drum wear. Now that's just what you would expect from one of the largest global friction manufacturers: brake technology that's miles ahead.



To learn more, visit us at www.FMheavydutyparts.com





FMVSS 121 TEST RESULTS

**FMVSS 121
BRAKE STANDARD***
Typical Dynamometer Plot

Test Parameters:

- Brake – Meritor 16.5" x 7" Q Plus
- Axle Load – 20,000 lbs.
- AL Factor – 165 (30x5.5)

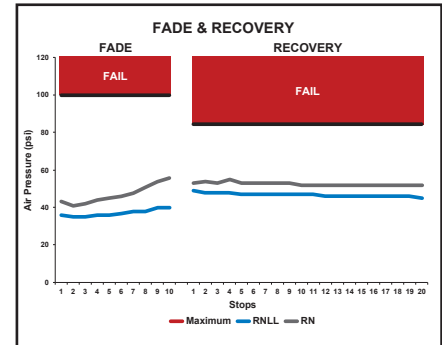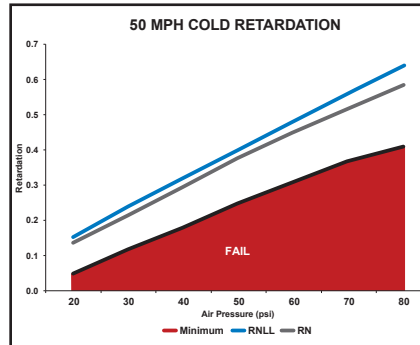

*FMVSS 121 performance test results for Abex 6326 RNLL conducted internally on Link-certified dynamometer. Test performed on a Meritor 16.5" x 7" Q Plus S-cam drum brake at 20,000 lbs. GAWR with an AL factor of 165 (30x5.5).

6326 RNLL LONG LIFE RSD PRODUCT RANGE

Current Part Number	New Part Number
RN4515EDBLK	RNLL4515EDBLK
RN4702D	RN4702D*
RN4707DBLK	RNLL4707DBLK
RN4709DBLK	RNLL4709DBLK
RN4711D	RNLL4711D
RN4715D	RNLL4715D
RN4718D	RNLL4718D
RN4719D	RNLL4719D
RN4720D	RNLL4720D
RN4725D	RNLL4725D
RN4726D	RNLL4726D

*RN4702D is not an RSD steer application

- Running change from Abex RN to new RNLL part numbers